



1741 Industrial Drive Unit #3, Sterling, IL, 61081

Ph: 815-632-3132 Fax: 815-716-8464

Email: info@aplusfine.com



Aplus Finetek Sensor, Inc. www.aplusfine.com

SPECIFICATIONS

Type	M30
Operating Voltage	20-250VAC,50-60HZ;20-250VDC
Sensing Distance	2-15mm adjustable (Shielded)
Ripple	DC RIPPLE <10%
No load current	<2.5mA
Max. load current	200mA
Leakge Current	<2.5mA
Surge Current	2.2A for 20ms
Min.Load Current	5mA
Output Mode	N.C.
Voltage Drop	≤10VAC ; ≤8VDC
Switching Frequency	25HZ AC;40Hz DC
Response Time	10ms
Switching Hysteresis	≤15% (Sr)
Repeat Accuracy	≤1% (Sr)
Protection Category	IP67
Operating Temperature	-25°C - +70°C
Short Circuit Protection	NO
Overload Trip point	-
Time Delay Before Availability	-
Output Indicator LED	RED LED ON when target is not present(N.C.)
EMC	RFI>3V/m EFT>1KV ESD>4KV(contact)
Shock/Vibration	IEC 60947-5-2,part7.4.1 IEC 60947-5-2,part7.4.2
Housing Material	PBT(BLACK)
External Sheath	GREY
Outer Jacket Material	PVC
Cable Length	2M
Cable Or Plug	Cable:OD5.8mm ID: 0.1*42*2C(22AWG)

PSC30 SERIES - PART# PS30-CCP1-3015U-B2L2

Units: mm

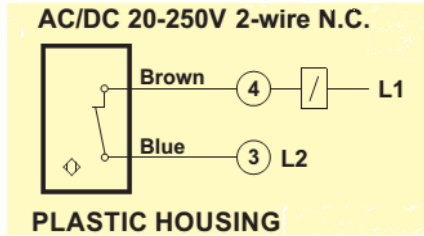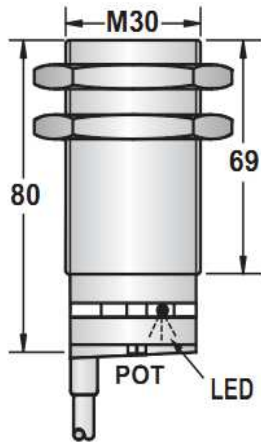

Aplus Fine
Aplus Finetek Sensor, Inc.

PS30-CCP1-3015U-B2L2 CE SF C US

CAPACITIVE AC/DC-N.C. 092016
Sn=15mm 20-250VAC/DC China
www.aplusfine.com

CUSTOMER	APPROVED BY	CONFIRMED BY	3RD ANGLE PROJECTION	
			Engineer: 19	Inspector: 27
			Manager: Steven C.	Date:20/02/2016
Do Not Scale This Drawing				
Rev.	Description	By	Date	

Aplus Finetek Sensor, Inc.

Part #:PS30-CCP1-3015U-B2L2
Description: M30 SIZE, 20-250VAC/DC, N.C., CAPACITIVE PROXIMITY SWITCH, PLASTIC HOUSING, 70C MAX OPER TEMP

Drawing No. REV A
Sheet 1 Of 1